


IMPACT INSULATED GLASS

Tempered / Laminated Insulated Glass: 

Kuraray (DuPont) SentryGlas®: NOA: 17-0808.02

LoE COATING & TINT OPTIONS

LoE³366/Argon (*green tint*)

LoE366/Argon: U = .24, SHGC = .27, VLT = 66%

LoE³340/Argon (*blue tint*)

LoE340/Argon: U = .25, SHGC = .18, VLT = 39%

Bronze Tint/Argon

Bronze Tint/Argon: U = .45, SHGC = .62, VLT = 61%

Gray Tint/Argon

Gray Tint/Argon: U = .45, SHGC = .60, VLT = 57%

Other:

**White Laminated, Obscure, Solar Reflective, or many other glass options available up request

FRAME FINISH OPTIONS

Mill Finish

Bronze Anodized

Clear Anodized

White Powdercoat

Other:

SKYLIGHT DIMENSION

Existing Curb

OR


Inside Skylight Frame

QTY =

SIZE =

MODEL DGCM - IMPACT RESISTANT INSULATED GLASS

DESIGN PRESSURE: +100psf / -100psf

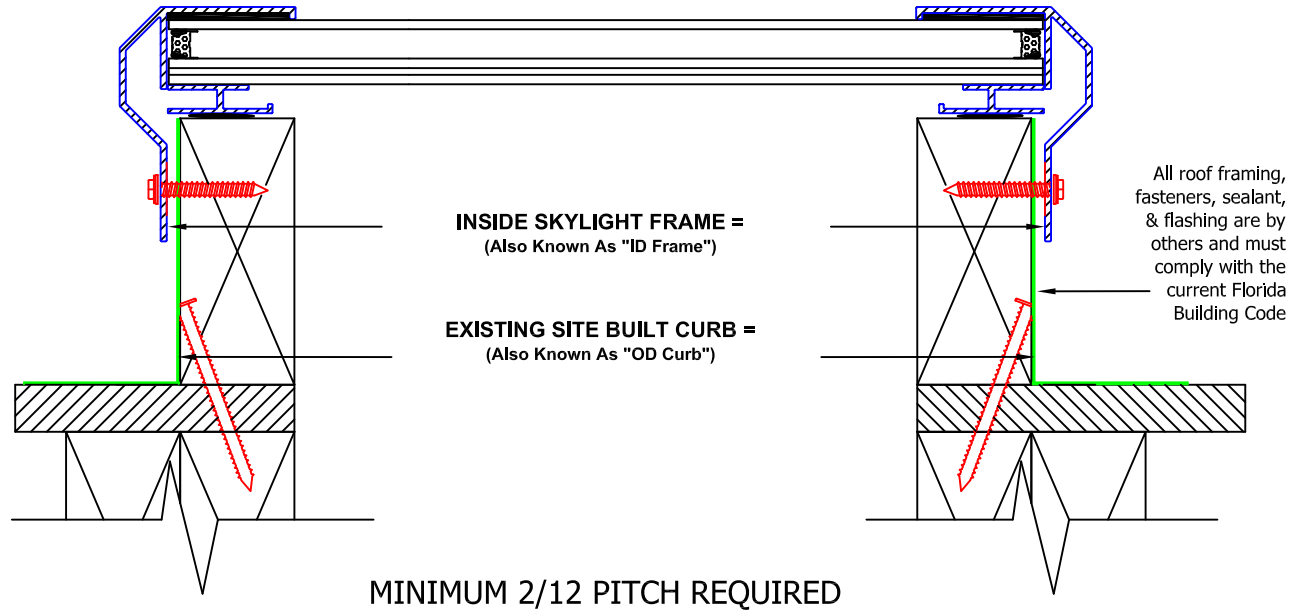

Miami-Dade NOA 15-0728.06 • 6th Edition FBC • TDI Report SK-18 • NAMI Certified

**Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-11

**Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4

**Meets impact resistance as required for the Seaward, Inland I & Inland II zones of the Designated Catastrophe Areas of the Texas Gulf Coast

**Meets OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 29 CFR 1910.23 & 1926.501 Fall Protection Required for Roof Openings

**Meets Forced Entry Protection ASTM F588 & UL 972

APPROVAL SIGNATURE & DATE



1630 Terre Colony Court Dallas, Texas 75214
P: 888.222.4898 P: 214.905.2021 F: 214.905.2024