

GLAZING

**THREE LAYERS OF POLYCARBONATE:
DOUBLE DOMES & ONE FLAT PANEL**

COLOR/ TINT OPTIONS

Visible Light Transmission

CLEAR	86%
DARK BRONZE	25%
WHITE	23%
WHITE: High Light Transmission	74%
LIGHT GRAY	50%
DARK GRAY (n/a as outer dome)	25%

OUTER DOME:

INNER DOME:

INNER MOST FLAT:

FRAME FINISH


- MILL FINISH
- BRONZE ANODIZED
- CLEAR ANODIZED
- WHITE POWDER COAT
- CUSTOM POWDER COAT

SKYLIGHT DIMENSION(S)

**INSIDE SKYLIGHT
FRAME DIMENSION** ■

SKYLIGHT #1:

SKYLIGHT #2:

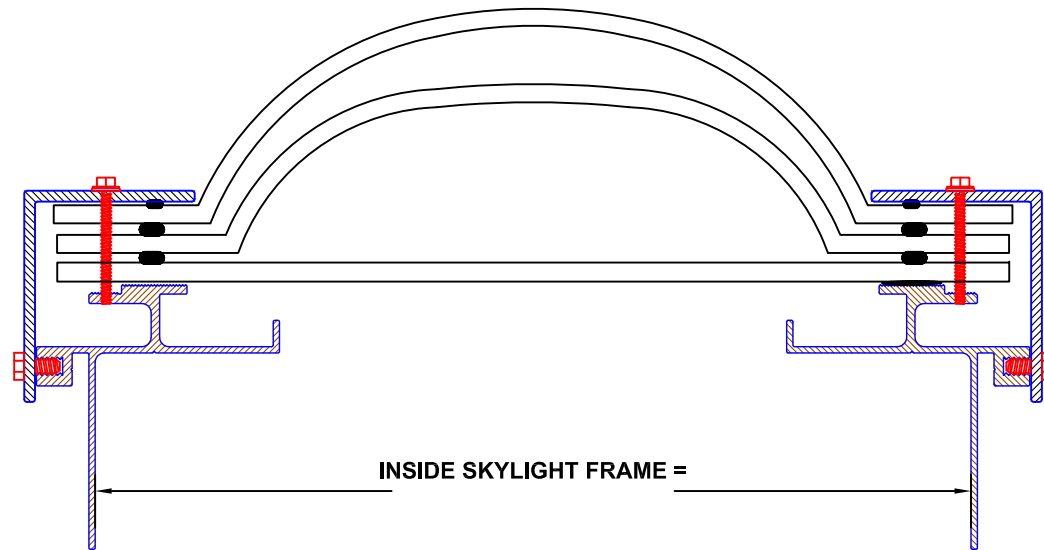

Miami-Dade NOA 15-0715.08 • FBC #FL2418-R9 • TDI Report SK-13 • NAMI Certified

**Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-08

**Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4

**Meets impact resistance as required for the Seaward, Inland I & Inland II zones of the Designated Catastrophe Areas of the Texas Gulf Coast

**Meets OSHA Fall Protection guidelines with no additional coverage/screen required
OSHA 29 CFR 1910.23 & 1926.501 Fall Protection Required for Roof Openings

**Meets Forced Entry Protection ASTM F588 & UL 972

Approved By:

Date:



1630 Terre Colony Court Dallas, Texas 75214
P: 888.222.4898 P: 214.905.2021 F: 214.905.2024

SPECIFICATIONS		
TEST PROTOCOL	TEST METHOD	ALLOWED
IMPACT RESISTANCE TAS 201-94	LARGE & SMALL MISSILE	PASS
STATIC AIR PRESSURE TAS 202-94	TEST PRESSURE +120/-150 psf	DESIGN LOAD: -75psf
CYCLIC WIND PRESSURE TAS 203-94	POSITIVE 40.0 PSF NEGATIVE 75.0 PSF	PASS PASS