

GLAZING

100% IMPACT MODIFIED ACRYLIC ■

GLAZING COLOR

<u>DOUBLE DOME</u>	Approx Light Transmission
CLEAR/ CLEAR	84%
BRONZE/ CLEAR	25%
CLEAR/ WHITE	43%
WHITE/ CLEAR	43%
OTHER	

CURB HEIGHT

9 " HEIGHT or 12" HEIGHT

OTHER CURB WALL HEIGHT

CURB MOUNT FRAME FINISH

- MILL FINISH
- BRONZE ANODIZED
- CLEAR ANODIZED
- WHITE POWDER COAT
- OTHER

CURB WALL FINISH


- MILL OUTER/ MILL INNER
- MILL OUTER/ WHITE INNER
- BRONZE OUTER/ MILL INNER
- BRONZE OUTER/ WHITE INNER
- WHITE OUTER/ WHITE INNER

ROUGH OPENING DIMENSION(S)

QTY =

RO =

Fall Protection Curb Mount Model & Maxim(um) Insulated Curb

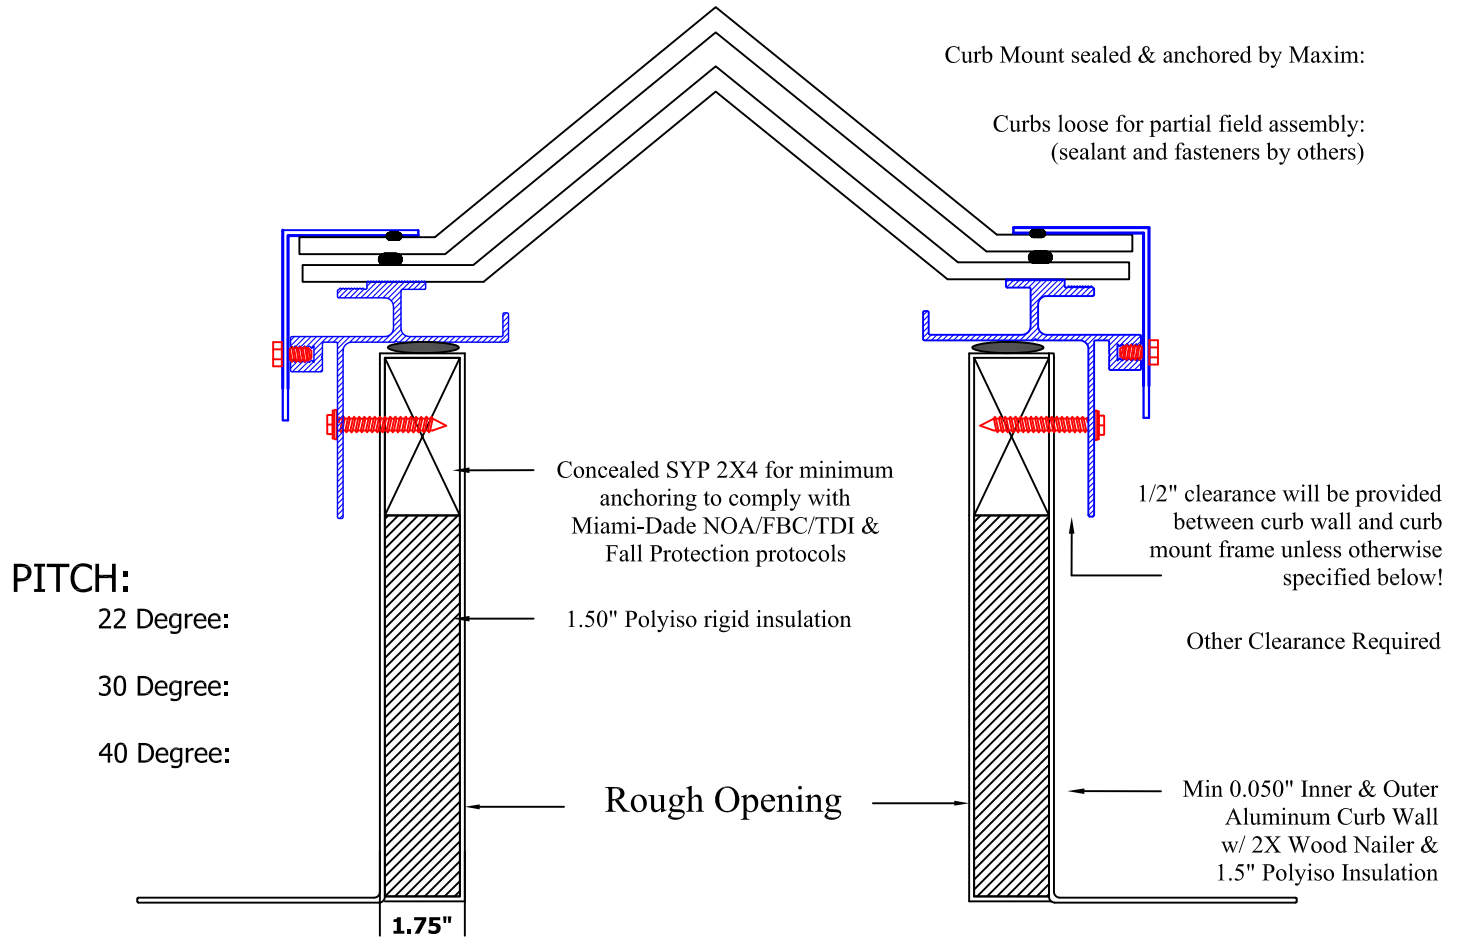

PITCH:

- 22 Degree:
- 30 Degree:
- 40 Degree:

****Meets OSHA Fall Protection guidelines with no additional coverage/screen required
OSHA 29 CFR 1910.23 & 1926.501 Fall Protection Required for Roof Openings**

Approved by:

Date:



1630 Terre Colony Court Dallas, Texas 75214
P: 888.222.4898 P: 214.905.2021 F: 214.905.2024

CCLI performed static load and drop/impact load test on the test specimen using a 200Lb bag filled with sand. Testing was performed to verify the skylight system meets the static load requirements of OSHA 29 CFR 1910.23 (e) (8) without the use of an exterior protective screen. Upon completion of the static load test the bag was raised to incremental heights and dropped onto the skylight glazing with no permanent damage to the skylight frame or glazing

Product Type:
Double Glazed Skylight
Product Drawings - Appendix A Series Model:
Maxim Skylights Series Fall Protection Curb Mount Mode
Test Methods:
OSHA 29 CFR 1910.23 (e) (8) & CFR 1910.23 (a) (4)
Skylight Size:
97" X 97" and includes all sizes equal to or less than total square footage of the test specimen
Glazing Type: .177" Duraplex 100% Impact Modified Acrylic
Drop Height: 2.0', 3.0', 4.0', 16.0' w/ no damage