

GLAZING

100% IMPACT MODIFIED ACRYLIC ■

GLAZING COLOR

<u>DOUBLE DOME</u>	Approx Light Transmission
CLEAR/ CLEAR	84%
BRONZE/ CLEAR	25%
CLEAR/ WHITE	43%
WHITE/ CLEAR	43%
OTHER	

FRAME FINISH

- MILL FINISH
- BRONZE ANODIZED
- CLEAR ANODIZED
- WHITE POWDER COAT
- CUSTOM POWDER COAT

SKYLIGHT DIMENSION

EXISTING CURB DIM OR

ID SKYLIGHT FRAME DIM

QTY =


SIZE =

Fall Protection Curb Mount Model

PITCH = 22 Degree:

30 Degree:

40 Degree:

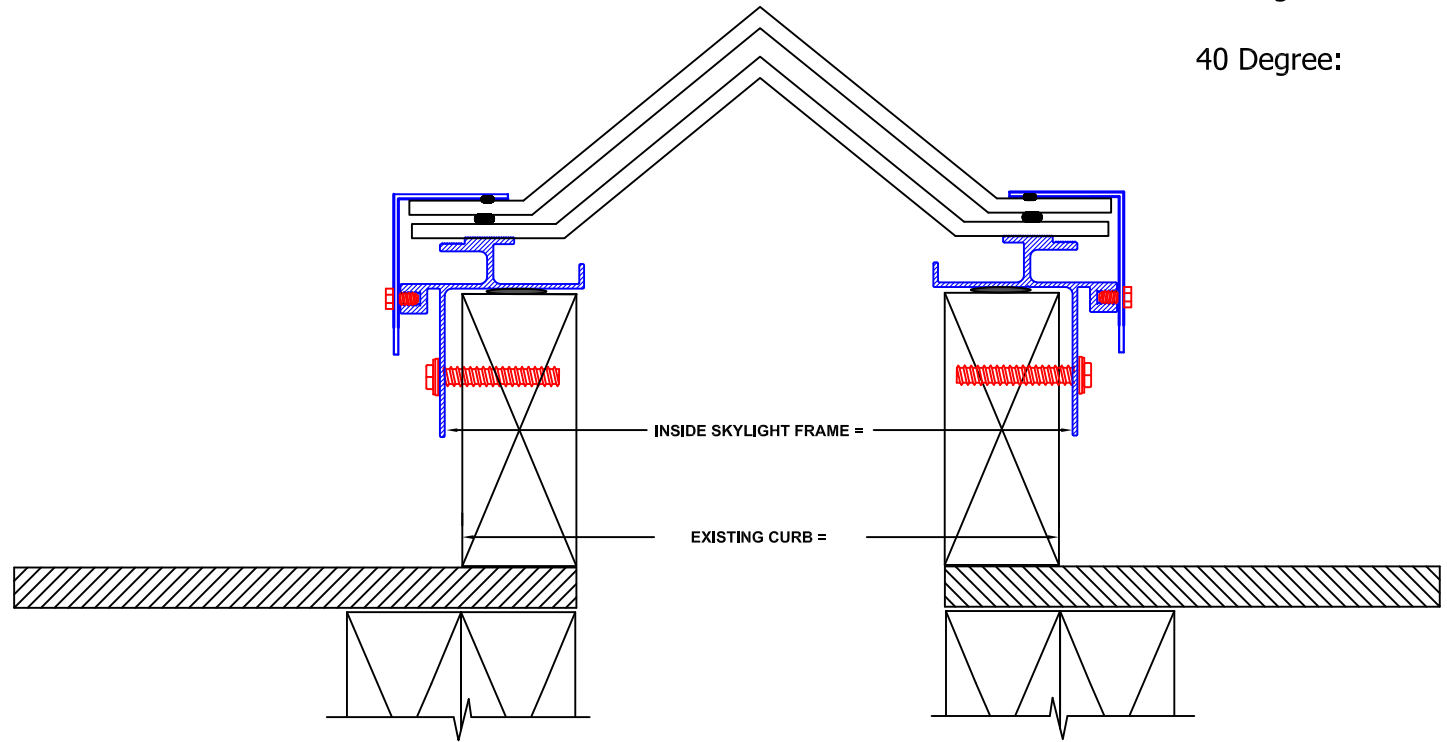

**\*\*Meets OSHA Fall Protection guidelines with no additional coverage/screen required  
OSHA 29 CFR 1910.23 & 1926.501 Fall Protection Required for Roof Openings**

Approved By:

Date:



1630 Terre Colony Court Dallas, Texas 75214  
P: 888.222.4898 P: 214.905.2021 F: 214.905.2024

CCLI performed static load and drop/impact load test on the test specimen using a 200Lb bag filled with sand. Testing was performed to verify the skylight system meets the static load requirements of OSHA 29 CFR 1910.23 (e) (8) without the use of an exterior protective screen. Upon completion of the static load test the bag was raised to incremental heights and dropped onto the skylight glazing with no permanent damage to the skylight frame or glazing

**Product Type:**

Double Glazed Skylight

**Product Drawings - Appendix A Series Model:**

Maxim Skylights Series Fall Protection Curb Mount Model

**Test Methods:**

OSHA 29 CFR 1910.23 (e) (8) & CFR 1910.23 (a) (4)

**Skylight Size:**

97" X 97" and includes all sizes equal to or less than total square footage of the test specimen

**Glazing Type:** .177" Duraplex 100% Impact Modified Acrylic

**Drop Height:** 2.0', 3.0', 4.0', 16.0' w/ no damage to frame or glazing