

## DOME MATERIAL

POLYCARBONATE DOME(S) = .118" Thick  
(Choose Polycarbonate for excellent impact resistance  
This is our standard material used)

IMPACT MODIFIED ACRYLIC DOME(S) = .187" Thick  
(Choose Impact Modified Acrylic for excellent impact resistance  
and for larger domes where thicker material is required)

## COLOR & TINT OPTIONS

	Approx Light Transmission	
	IM Acrylic	Polycarb
CLEAR/ CLEAR	85%	85%
CLEAR/ BRONZE	24%	25%
CLEAR/ WHITE	47%	27%
CLEAR/ 74% WHITE	N/A	68%
BRONZE/ CLEAR	24%	25%
BRONZE/ BRONZE	7%	7%
WHITE/ CLEAR	47%	27%
74% WHITE/ CLEAR	N/A	68%
CLEAR/ LIGHT GRAY	N/A	45%
CLEAR/ DARK GRAY	N/A	25%

OTHER:

QTY =

DIM. #1 =


DIMENSION #2 =

DIMENSION #3 =



## REPLACEMENT DOME CHECKLIST: DOUBLE DOMES

### DOUBLE DOMES

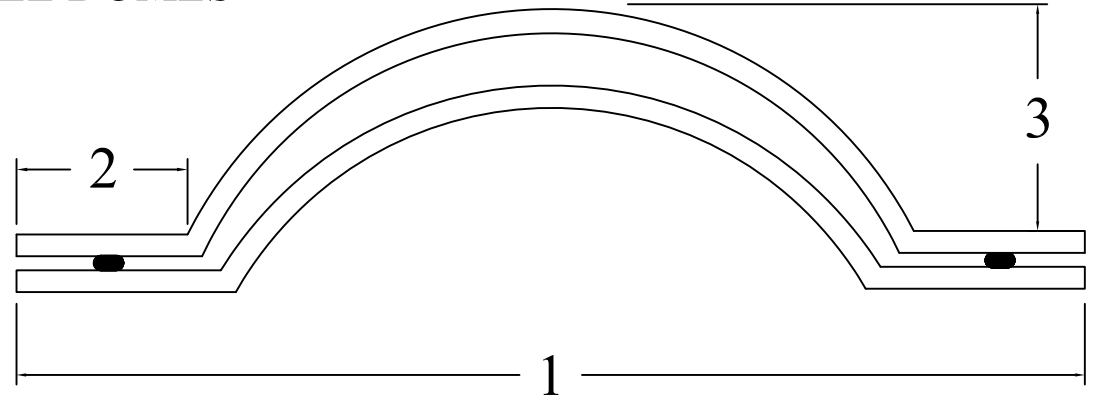

The above shape is the only option available. If there is a 90 degree bend where the flange (dim #2) intersects the dome rise, our replacement domes will not fit your frame. It is the purchasers responsibility to confirm shape and compatibility with the existing frame.

Sealant tape for use between the domes is included and provided loose unless noted otherwise on your sales order. Please refer to the installation instructions for proper application of the sealant tape.

No sealant, fasteners or gaskets of any kind are included or available.

Approved By:

Date: