Quantity:

Inside Dimension of Pre-Finished Skylight



INSULATED GLASS CONFIGURATION

(Maxim to use standard thickness glass unless specified)

3.1mm

3.9mm

4.7mm

5.7mm

TEMPERED/ TEMPERED

TEMPERED/ LAMINATED PVB (8.6mm)

TEMPERED/ LAMINATED SGP (8.6mm)

DuPont SentryGlas® Interlayer Miami-Dade NOA: 11-0624.01

Other:

COATING & TINT OPTIONS (vlt%)

LoE³366/Argon (63%):

LoE³340/Argon (39%):

Bronze Tint (47%):

Gray Tint (47%):

Other:

FRAME FINISH OPTIONS

Dark Bronze Anodized:

Mill:

Clear Anodized:


White Powdercoat:

Custom Powdercoat:



PRE-FINISHED SELF FLASHING & INSULATED GLASS

Dow Corning 795 Silicone Building Sealant, Glass bite = 1.75" .080" 6063 T5 Extruded aluminum frame. Cardinal Corparation Insulated Glass; Mitered and welded at four corners Tempered - argon gas filled 3/8" or 5/8" air space w/ XL Edge desiccant filled stainless steel spacer - Tempered 6063 T5 Extruded aluminum gutter seat, Mitered and welded at four corners Dow Corning 795 Structural Silicone Sealant Minimum #12 X 1,5" stainless steel fastener with minimum Sealant applied and provided by installer 1.25" embedment, 3.5" from each corner & maximum 9" o.c. .060 Extruded/Coil aluminum flashing, fully welded at each corner. Curb Buck, Insulation & Flashing: *OPTIONAL ACCESSORY BY MAXIM SYP 2 X 6 with 3/8" thick white finished PVC Minimum 12d nail or #6 X 3 1/4" stainless steel fastener insulation, Fully adhered and mechanically 6" o.c. with minimum embeddment of 2" fastened as per test sample and NOA. *OPTIONAL ACCESSORY BY MAXIM Roof deck (by others)

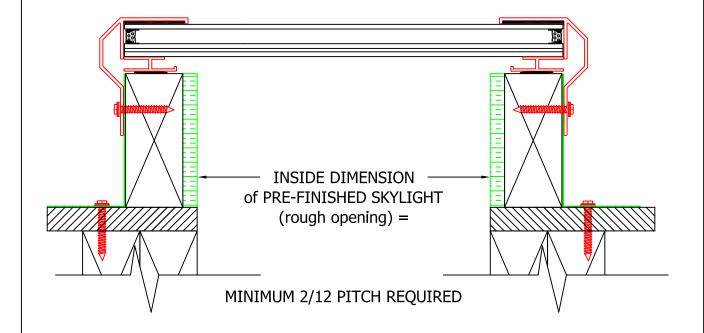

Approved By:

Date:

1630 Terre Colony Court Dallas, Texas 75212 PH: 214.905.2021 FAX: 214.905.2024