

GLAZING

Single .125" Polycarbonate Outer Dome & ■
 16mm RDC 5 Layer Multiwall Polycarbonate

GLAZING COLOR

Approx Light
Transmission

CLEAR DOME / CLEAR 16mm	60%
CLEAR DOME / WHITE (Opal) 16mm	37%
WHITE 74% DOME / CLEAR 16mm	48%
WHITE 27% DOME / CLEAR 16mm	18%
BREEZE IR DOME/ CLEAR 16mm	46%
BREEZE IR DOME/ WHITE (Opal) 16mm	28%

OTHER GLAZING:

DOME:

16 mm RDC Multiwall:

FRAME FINISH


- MILL FINISH
- BRONZE ANODIZED
- CLEAR ANODIZED
- WHITE POWDER COAT
- CUSTOM POWDER COAT

SKYLIGHT DIMENSION

EXISTING CURB DIM OR
ID SKYLIGHT FRAME DIM

QTY =

SIZE =

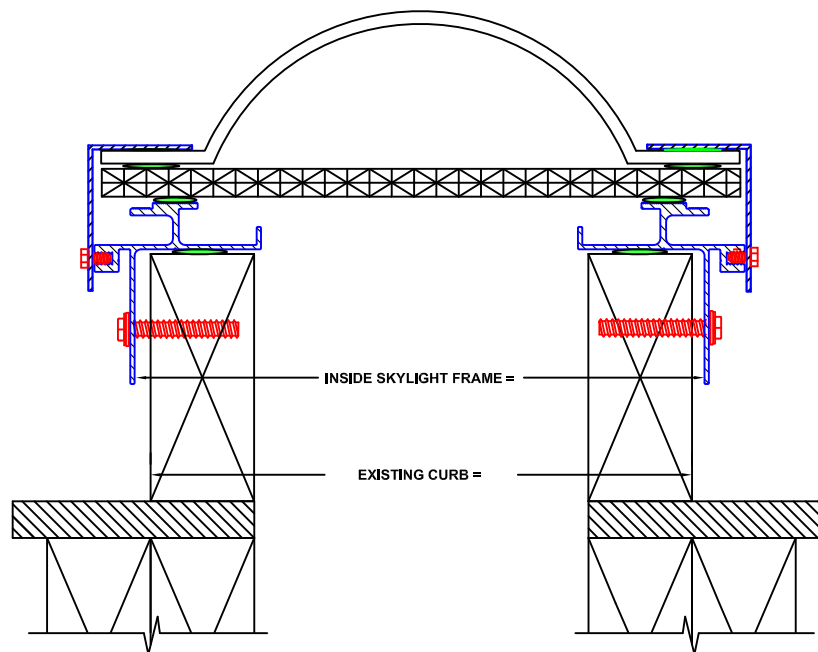

Miami-Dade NOA 18-0301.01 • FBC #FL21896 • NAMI Certified
ASTM F2912 & ASTM F1642: Airblast Loading; Standard Specification & Test Method for Glazing & Glazing Systems
GSA-TS01-2003: Dynamic Overpressure Loading; Glazing & Glazing Systems
UFC 04-010-01: UFC, DoD Minimum Antiterrorism Standards for Buildings

- **Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-08
- **Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4
- **Meets impact resistance as required for the Seaward, Inland I & Inland II zones of the Designated Catastrophe Areas of the Texas Gulf Coast
- **Meets OSHA Fall Protection guidelines with no additional coverage/screen required
 OSHA 29 CFR 1910.23 & 1926.501 Fall Protection Required for Roof Openings
- **Meets Forced Entry Protection ASTM F588 & UL 972

APPROVAL SIGNATURE & DATE

MAXIM SKYLIGHTS
 1630 Terre Colony Court Dallas, Texas 75214
 P: 888.222.4898 P: 214.905.2021 F: 214.905.2024