

## DOME MATERIAL

POLYCARBONATE DOME(S) = .118" Thick  
(Choose Polycarbonate for excellent impact resistance  
This is our standard material used)

IMPACT MODIFIED ACRYLIC DOME(S) = .187" Thick  
(Choose 100% Impact Modified Acrylic for excellent impact  
resistance and for larger domes where thicker material is required)

## COLOR & TINT OPTIONS

	Approx Light Transmission	
	IM Acrylic	Polycarb
CLEAR	85%	85%
BRONZE	24%	25%
STANDARD WHITE	47%	27%
HIGH LIGHT TRANS WHITE	N/A	74%
LIGHT GRAY	N/A	47%
DARK GRAY	N/A	N/A

OTHER:

## PYRAMID PITCH - Degrees

22 DEGREES      30 DEGREES      40 DEGREES

SPECIAL PITCH (Degrees/ Height)

QTY =

DIM. #1 =                      X


DIM. #2 (flange) =

DIM. #3 (height) =



## REPLACEMENT PYRAMID DOME CHECKLIST: SINGLE

### SINGLE DOME

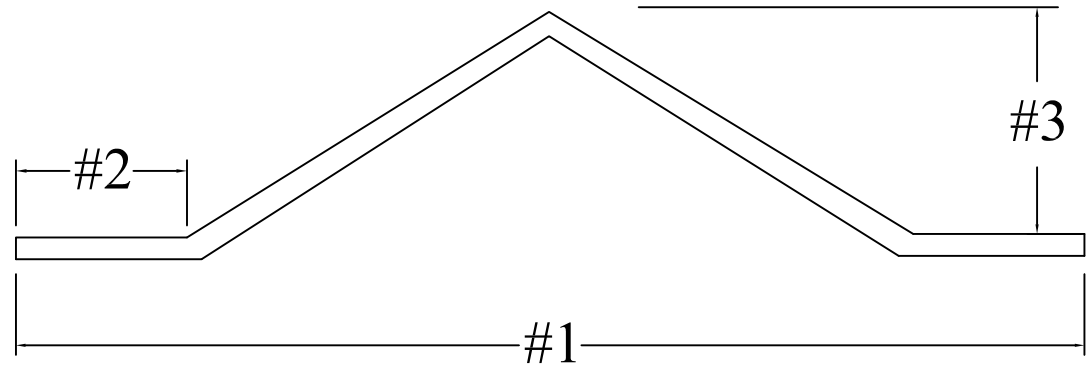

### Width X Length is Required

The above shape is the only option available. If there is a 90 degree bend where the flange (dim #2) intersects the dome rise, our replacement domes will not fit your frame. It is the purchasers responsibility to confirm shape and compatibility with the existing frame.

Replacement Pyramid Dome is a formed piece of plastic and no sealant, fasteners or gaskets of any kind are included.

The flange(s) of replacement dome(s) or pyramid(s) will have a visible lack of uniformity or flatness and appear as a "wave". This is normal, unavoidable and will flatten upon proper installation in the existing frame.

Approved By:

Date: