

GLAZING TYPE

POLYCARBONATE DOUBLE DOME(S) ■

DOMES COLORS (outer/ inner)

	Approx Light Transmission
CLEAR/ CLEAR	84%
CLEAR/ BRONZE	25%
BRONZE/ BRONZE	7%
CLEAR/ HIGH LIGHT WHITE	68%
HIGH LIGHT WHITE/ CLEAR	68%
CLEAR/ STANDARD WHITE	27%
STANDARD WHITE/ CLEAR	27%
OTHER	

FRAME FINISH

- MILL FINISH
- BRONZE ANODIZED
- WHITE PAINTED
- OTHER


SKYLIGHT DIMENSION

ROUGH OPENING: "RO" ■

THE ROUGH OPENING IS ALSO KNOWN AS THE "ID" or INSIDE SKYLIGHT FRAME DIMENSION

QTY =

SIZE =

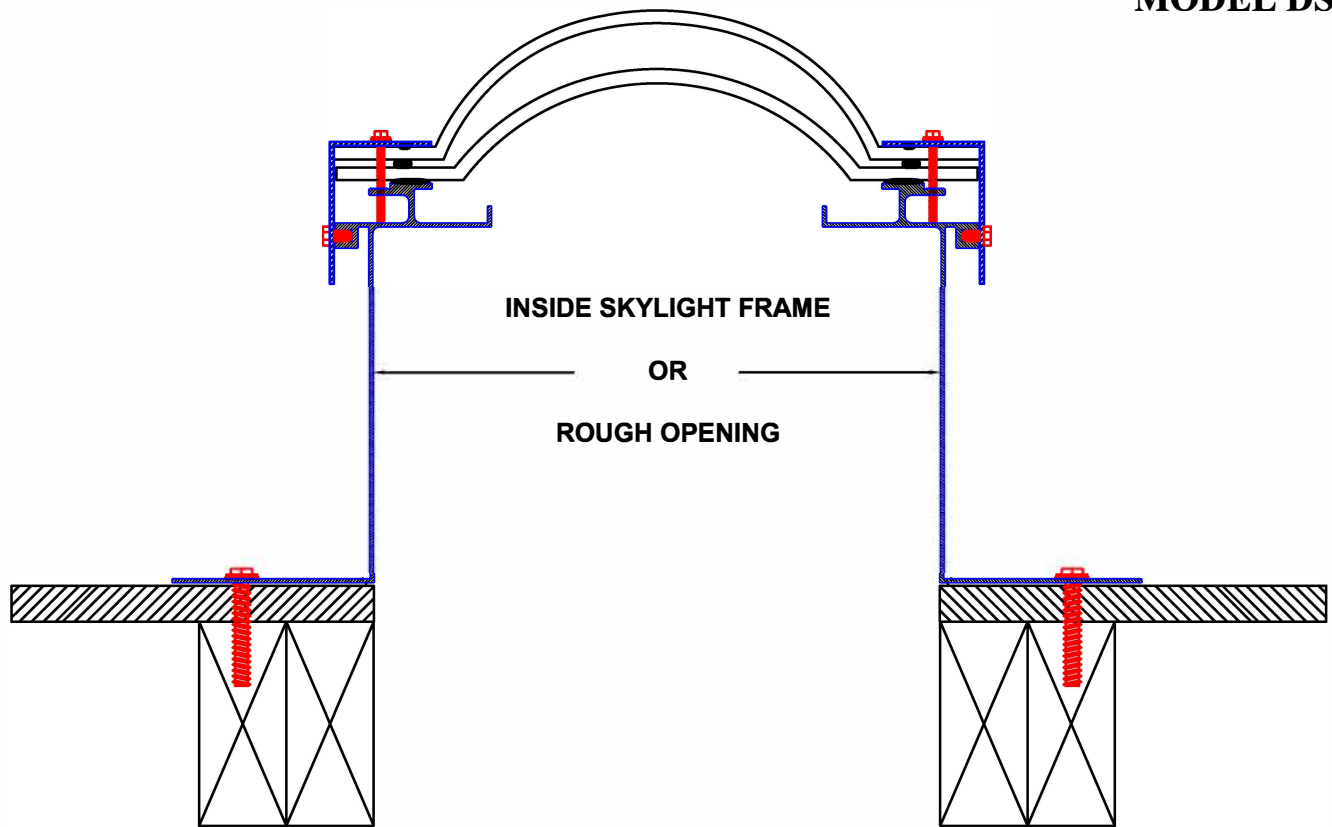

Miami-Dade NOA 24-0109.02 • 8th Edition 2023 FBC FL2418-R15 • TDI Report SK-13 • NAMI Certified

- **Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-11
- **Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4
- **Meets impact resistance as required for the Seaward, Inland I & Inland II zones of the Designated Catastrophe Areas of the Texas Gulf Coast
- **Meets OSHA Fall Protection guidelines with no additional coverage/screen required OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(1), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement. Maxim Test loads = minimum 900 ft/lbs up to >3000 ft/lbs
- **Meets Forced Entry Protection ASTM F588 & UL 972

APPROVAL SIGNATURE & DATE


MAXIM
S K Y L I G H T S
 201 Longhorn Rd. Fort Worth, Texas 76179
 P: 800.731.0326 P: 817.439.9266 F:817.232.8468