

**GLAZING TYPE**

POLYCARBONATE DOUBLE DOME(S) ■

**DOME COLORS**

(Outer Dome/ Inner Dome)

Approx Light Transmission

CLEAR/ CLEAR	84%
CLEAR/ BRONZE	25%
BRONZE/ BRONZE	7%
CLEAR/ HIGH LIGHT WHITE	68%
HIGH LIGHT WHITE/ CLEAR	68%
CLEAR/ STANDARD WHITE	27%
STANDARD WHITE/ CLEAR	27%
OTHER	

**CURB MOUNT FRAME FINISH**

- MILL FINISH
- BRONZE ANODIZED
- CLEAR ANODIZED
- WHITE POWDER COAT

**CURB WALL FINISH**

- MILL OUTER - MILL INNER
- MILL OUTER - WHITE INNER
- BRONZE OUTER - MILL INNER
- BRONZE OUTER - WHITE INNER
- WHITE OUTER - WHITE INNER
- OTHER

**SKYLIGHT DIMENSION**

**ROUGH OPENING: "RO"** ■

THE ROUGH OPENING IS ALSO KNOWN AS THE "ID" or INSIDE SKYLIGHT CURB WALL DIMENSION



QTY =

SIZE =

**MODEL ISF (Model DCM & Maxim(um) Insulated Curb)**

PITCH =

- 22 Degree
- 30 Degree
- 40 Degree

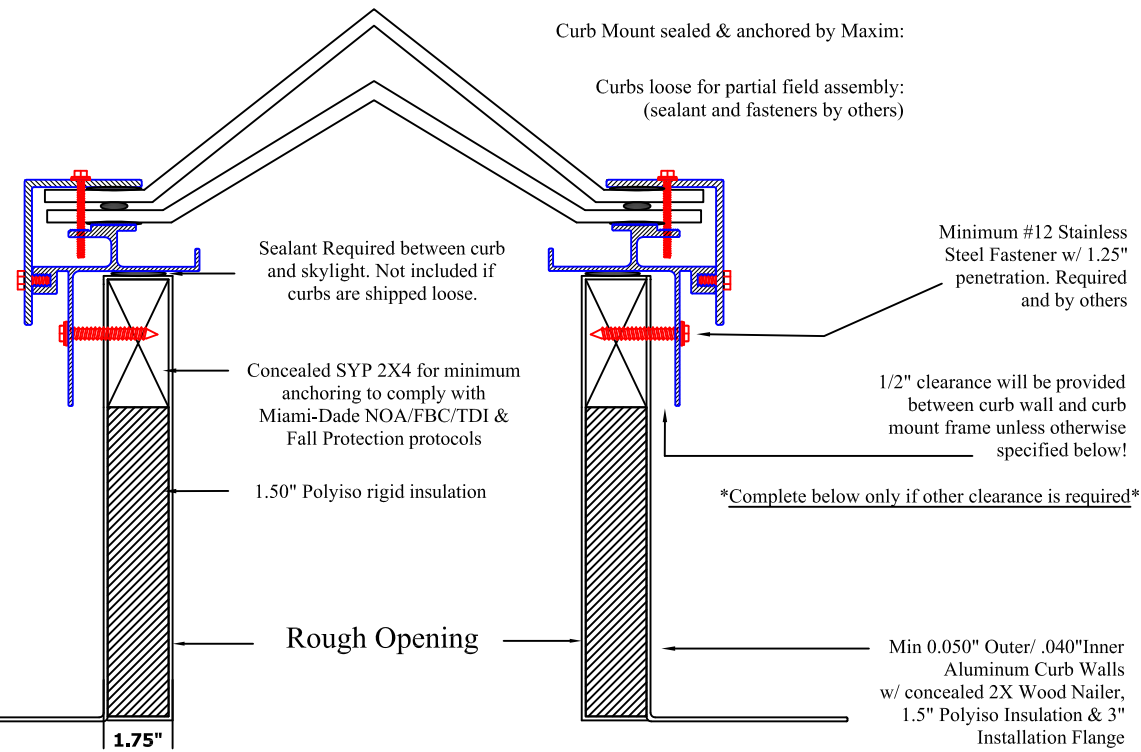

**Miami-Dade NOA 18-0307.10 • FBC #FL2418-R11 • TDI Report SK-13 • NAMI Certified**

\*\*Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-08

\*\*Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4

\*\*Meets impact resistance as required for the Seaward, Inland I & Inland II zones of the Designated Catastrophe Areas of the Texas Gulf Coast

\*\*Meets OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 29 CFR 1910.23 & 1926.501 Fall Protection Required for Roof Openings

\*\*Meets Forced Entry Protection ASTM F588 & UL 972

\*\*Units can be submitted under Miami-Dade NOA or FBC Approval

\*\*Where Miami-Dade NOA, FBC approval number or TDI Report are required, verify that pyramid domes will be acceptable for use by local building department

APPROVAL SIGNATURE & DATE



1630 Terre Colony Court Dallas, Texas 75214  
P: 888.222.4898 P: 214.905.2021 F: 214.905.2024